



Image is for illustrative purposes only. Actual product may vary.

Nominal data

Model	BC-B190B-EC-06	
Motor model	MEC3C-72-95-01	

Phase		1~
Nominal Voltage	VAC	120
Nominal voltage range	VAC	
Frequency	Hz	50/60

Speed	RPM	2700
Power consumption	W	48
Current draw	A	0.7
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	+50

Power and current values represent maximum ratings; speed values are specified at maximum efficiency point.

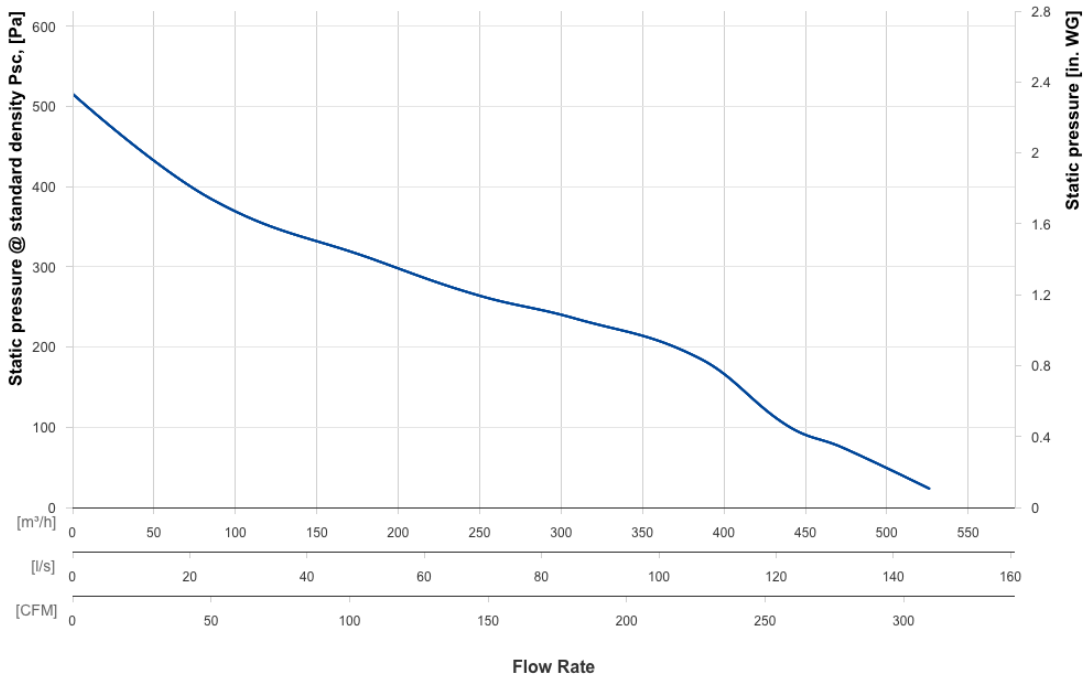
Data according to Commission Regulation (EU) 2024/1834

General parameters		
Measurement category		
Overall efficiency, ns	%	
Minimum efficiency, n	%	

Working point		
Power	W	
Flow rate	m ³ /h	
Pressure (Ps)	Pa	

Technical Data

Weight	1 kg
Impeller size	190 mm
Impeller material	PA plastic + 30% glass fiber
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Motor size	72
Bearing type	Ball bearings
Insulation class	B
Degree of protection	IP55
Motor protection	Self-resetting TOP wired internally
Operation mode	Continuous duty (S1)
Installation position	Any
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Cable length	500 ±20 mm
Technical features	<ul style="list-style-type: none"> - Soft Start - Overcurrent Protection - Excessive Voltage Protection - Less Voltage Protection - Thermal Protection - Locked Rotor Protection - Control Input 0-10 VDC / PWM - Output 10 VDC, Max. 10 mA
Conformity with standards	<ul style="list-style-type: none"> - Material compliance: RoHS, REACH - Quality certification: ISO 9001 - North America compliance: cETLus (3166456) - Safety standards: UL 507, CSA C22.2 № 113
Warranty period	2 years / 40 000 motor hours

Curves: Air performance 50 Hz


V	U, V	P, W	I, A	n, min ⁻¹	Psc, Pa	Psc, in.WG	Q, L/s	Q, m³/h	Q, CFM	W/(l/s)
10V	120	48,0	0,69	2808	23,6	0,10	146,1	525,9	309,2	0,33
10V	120	48,0	0,69	2720	74,7	0,30	131,3	472,8	278,0	0,37
10V	120	48,0	0,69	2696	102,0	0,41	121,9	439,0	258,1	0,39
10V	120	48,0	0,69	2696	186,0	0,75	106,9	385,0	226,4	0,45